
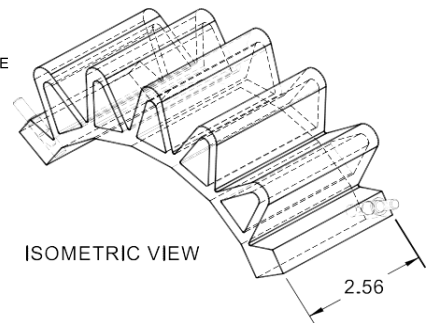


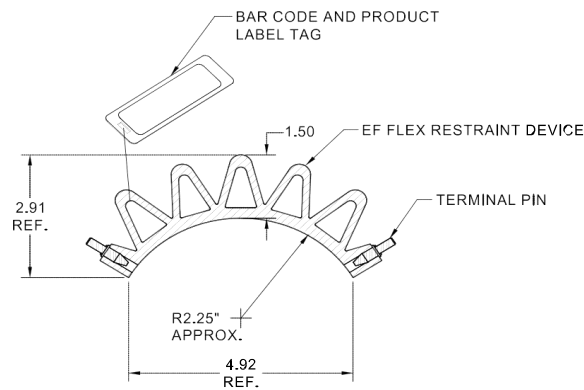

Flex Chart

d _{nom} (in)	DR 9 Number of Restraints Needed	DR 11 Number of Restraints Needed	DR 15 Number of Restraints Needed	DR 17 Number of Restraints Needed	DR 24 Number of Restraints Needed	DR 26 Number of Restraints Needed	DR 32.5 Number of Restraints Needed	Max. Number of Restraints in Perimeter
6.625	2	2	2	2	2	2	2	3
8.625	2	2	2	2	2	2	2	4
10.750	3	2	2	2	2	2	2	5
12.750	4	3	2	2	2	2	2	6
14.000	4	4	3	3	2	2	2	7
16.000	5	5	4	3	2	2	2	8
18.000	7	6	4	4	3	3	2	9
20.000	8	7	5	5	4	3	3	10
22.000	10	8	6	6	4	4	3	11
24.000	11	10	7	7	5	5	4	12
26.000	13	11	9	8	6	5	4	13
28.000	15	13	10	9	7	6	5	14
30.000	18	15	11	10	7	7	6	15
32.000	20	17	13	11	8	8	6	16
34.000	22	19	14	13	9	9	7	17
36.000	25	21	16	14	10	10	8	18
38.000	28	23	18	16	12	11	9	19
40.000	31	26	20	18	13	12	10	20
42.000	34	29	22	19	14	13	11	21
44.000	37	31	24	21	15	14	12	23
46.000	41	34	26	23	17	16	13	24
48.000	44	37	28	25	18	17	14	25

Note Please contact a Rahn Customer Sales Rep for availability

Note Axial resistance rated at 7,000 lbf. per saddle



Rahn Plastics Incorporated
54 Ferris Drive, North Bay
Ontario, Canada P1A 4M3
www.rahnplastics.com

(Local) 1-705-495-6777
(Toll Free) 1-888-433-0111
(Fax) 1-866-495-6820